




# Model 508 Process Analyzer

The Guided Wave Model 508 Process Analyzer is a multi-channel, fiber optic, UV-VIS spectrophotometer system designed for use in process environments. Configurable with up to 4 channels, the Model 508 comes in a NEMA 4 enclosure with built-in thermal control to enable the most consistent performance possible while in 24/7 service mode. Up to 16 parameters may be monitored on each channel making it suitable for many applications in chemical and polymer plants, refining and petrochemical, pharmaceuticals and other specialty chemicals, paints and varnishes, adhesives, wastewater management, biotech, etc. It has a built-in computer control unit with touch screen for convenient user interfacing to the Windows™ operating software.

## Reliable, Rugged, and Flexible

By partnering with Guided Wave you gain the advantage of 20+ years focusing on the on-line analytical needs of the chemical processing industry. Our entire product line is designed and developed to meet the challenges of the production environment. We favor modular, units exemplified by the 508's "snap tight" installation dock. The Xenon source lamps can last for up to 2 years.

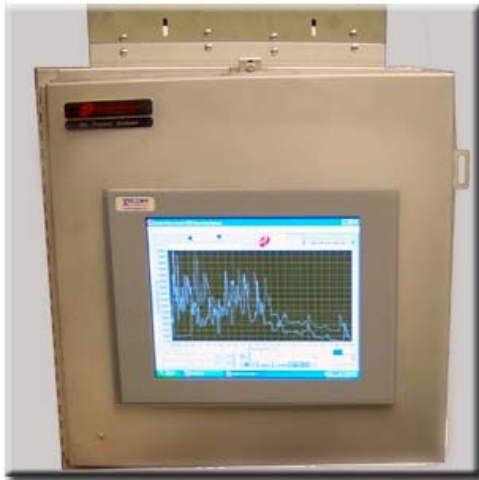

## Features

- Rapid data collection with *enhanced* diode array miniaturized optical bench
- Built-in Instrument Control Unit (PC) with touch screen and Windows™ XP
- Analyzer control program developed in LabVIEW™ featuring customizable settings & trending capability
- Modbus communications with built-in event setup. Optional Opto-22 panel and communications for analog and discrete interfacing
- Compatible with Guided Wave's proven probe and flow cell products
- Fully insulated NEMA 4 or NEMA 4X enclosure with built in Internal Thermal Control
- Full spectrum scanning, 235 nm to 850 nm
- Multi-channel design from 1 to 4 channels
- Individual pulsed Xenon source on each channel
- Unscrambler® Calibration Model Ready (with option Unscrambler® Predictor)
- GW ASCII and simple B-vector model method
- Built-in Color Analysis

### Guided Wave Incorporated

3033 Gold Canal Drive  
 Rancho Cordova, CA 95670  
 Tel: 916-638-4944  
 Fax: 916-635-8458  
 gwinfo@guided-wave.com

[www.guided-wave.com](http://www.guided-wave.com)

Literature: #1023-09-10

### Guided Wave Europe BVBA

Leo de Béthunelaan 105/0001  
 9300 Aalst  
 Belgium  
 Tel: +32-53-631165  
 Fax: +32-53-631696  
 gwinfo@guided-wave.com



## Specifications

Wavelength Range	235 nm – 850 nm
Wavelength Accuracy	±0.1 nm
Photometric Noise	0.001 @ 0 AU, 550 nm
Stray Light	< 0.1 % @ 220 nm
Number of Pixels	1024
Bandwidth	< 3 nm
Dynamic Range	2000:1 for a single scan
Fiber Optic Connections	SMA 905
Instrument Control Unit (ICU) (General Purpose enclosure only)	Pentium 850 MHz w/250MB RAM, CD-ROM, Floppy, 18 GB Hard drive, 12.1" 800x600 AMTFT Color Display, Ethernet, and 2-USB, 3-RS232, 1-PCI Slot, 1-PSI/ISA Slot, 1-Parallel Port, and 1-RS232/485 Ports
Operating System	Windows XP®
Temperature Range	0 °C to 40 °C
Internal Thermal Control	±0.5 °C between 30 °C and 40 °C
Humidity	10% to 90% RH, non-condensing
Power	110/220 Vac 50/60 Hz, 1500 W
Dimensions (w x d x h)	24"x 17.7" x 29.3" [61 cm x 44.9 cm x 73.4 cm] -OR- 30"x 17.7" x 41.3" [76 cm x 44.9 cm x 105 cm]
Weight	200 lbs [91 kg]

## Options

- Class 1 Div 2 Groups C & D, Z-Purge
- Class 1 Div 1 Groups B & C, X-Purge
- ATEX Certified Purge
- SNAP I/O analog and discrete communications package by Opto-22
- Unscrambler® online predictor

*Specifications are subject to change without notice.*

## Applications

- Solvent recovery purity
- Maleic acid in tetrahydrofuran (THF)
- Tert-butyl catechol (TBC) polymerization inhibitor in butadiene
- Trace (ppm level) impurities in wash water; Clean-In-Place for Pharma
- Polynuclear aromatics (PNA's) in middle distillates
- Phenol in cyclohexanone
- Sodium hypochlorite in bleach solutions
- Aromatics in monomers Benzene in cyclohexane
- Saybolt or ASTM color of diesel and jet fuels
- Toluene diisocyanate in polyurethane
- UV inhibitors in polymers
- Antioxidants in polymers and plastics
- Color and clarity of varnishes

**Guided Wave Incorporated**  
3033 Gold Canal Drive  
Rancho Cordova, CA 95670  
Tel: 916-638-4944  
Fax: 916-635-8458  
gwinfo@guided-wave.com

[www.guided-wave.com](http://www.guided-wave.com)

Literature: #1023-09-10

**Guided Wave Europe BVBA**  
Leo de Béthunelaan 105/0001  
9300 Aalst  
Belgium  
Tel: +32-53-631165  
Fax: +32-53-631696  
gwinfo@guided-wave.com