

# ASTM Color Analyzer

## Complete Analytical System for Measuring ASTM Color (ASTM D1500, ASTM D1524)

The visual ASTM color test is often used for field examination control purposes because it is an easy, rapid determination of product quality or contamination before doing a full evaluation. ASTM color (reference ASTM D1500, ASTM D6045) is primarily used in characterizing high chroma or more colorful petroleum products. These fuels include lubricating oils, heating oils, diesel fuels, and petroleum waxes. The ASTM color scale ranges from 0.5 to 8. The lowest value of 0.5 being a light yellow, 2 being yellow, 5 being orange, and 8 being a deep red. Both of these ASTM methods are off-line manual laboratory evaluations.

These tests require an observer to compare the color of a product to a known standard, and then judge the "color." Using a Guided Wave ASTM Color Analyzer system automates the color measurement within the process, ensuring the most accurate product quality standard during manufacturing. The analyzer eliminates the visual judgement of a technician and delivers online real-time process control information to the process operators.

### System Configuration

The Guided Wave ASTM Color Analyzer system is a complete solution. The "ready-to-go" analytical system includes:

- Analyzer - ClearView® db filter photometer technology
- Fiber optic cables
- Sample interface - insertion probe or flow cell
- Control software and ASTM application calibration

### Accurate, Real-time Reliable Results

The ASTM Analyzer system utilizes a Guided Wave multi-wavelength ClearView db filter photometer analyzer platform. It may be configured for either one (1) or two (2) independent sample monitoring points. The ClearView db analyzer is configured with application-appropriate wavelengths to measure the ASTM color of the sample. The analyzer employs a dual-beam design – meaning; the system has an continual internal optical reference check that allows it to self-compensate for signal variation due to non-sample conditions. This ultimately provides the system with long term analyzer stability. The final product is a total ASTM Color System that measures the color variation without interference from other factors.

Figure 1 shows an initial calibration chart showing the measured values as compared to laboratory standard values.

### Complete ASTM Color Analyzer System

- Unique dual beam optics - for long term, stable operation
- Up to two (2) independent measurement points - for added analytical flexibility at reduced cost per point
- High efficiency yet rugged fiber optics - analyzer electronics can be located away from a hazardous sample point
- In-door touch screen or Ethernet (Modbus TCP) - easy local or remote analyzer operation and control
- Analytical calculations are all encoded in the software - answers and alarms are clearly reported


### The Smart Choice

Guided Wave's ASTM Color Analyzer system delivers accurate, real-time process measurement results. Its linearity and repeatability, as well as its low maintenance requirements make it a cost effective, smart choice to help optimize production, improve yields, ensure consistent product quality and enhance profitability.

### Why Choose Guided Wave

- Over 33 years of online process experience with analyzers installed worldwide.
- A total solution with optically matched components and a well-planned calibration approach leading to your long-term success and overall cost savings.
- Expert technical support and responsive global service for the lifetime of the system.
- For a company you can depend on - for control you can measure!

### ASTM Color Analyzer Enclosure Options

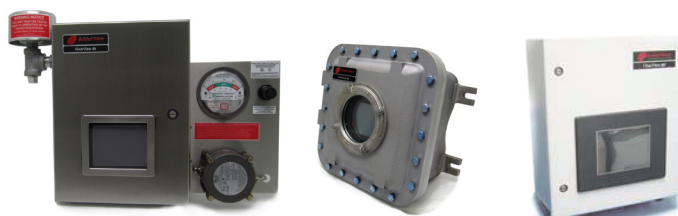

Z-Purge Unit  
Class I, Division 2

X-Proof Unit  
Class I, Division 1,  
IECEx, ATEX

General  
Purpose Unit

# ASTM (D1500) Color Analyzer

Complete Analytical System for Measuring ASTM color (ASTM D1500, ASTM D1524)

## Example of ASTM Color Measurement

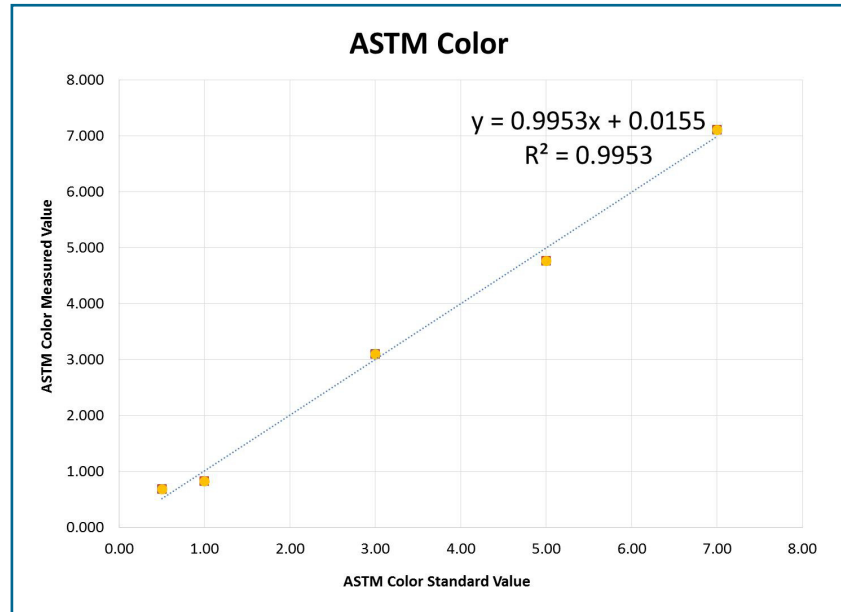


Figure 1

## ASTM Color Analyzer System Specifications

Analyzer Technology	Fiber optic dual-beam ClearView db photometer (see also document #1033)
Fiber Connectors	SMA 905
Light Source	Tungsten-Halogen, >4000 hours typical
Photometric Noise	<50 $\mu$ AU 450-2100 nm 1 minute rms
Photometric Drift	<500 $\mu$ AU rms/ $^{\circ}$ C
Response Time	1 second, minimum. User settable
Measurement Range	0.5 to 7 ASTM units (pathlength can be optimized to increase sensitivity)
Measurement Accuracy	Complies with ASTM methods D1500, D1524
Power	24 VDC, 3 A; 72 watts
Environmental	0 – 45 $^{\circ}$ C, 0 – 90%, sun and rain sheltered

## Options for a Custom Solution

Another advantage of the ASTM Analyzer system is that it can be customized in many ways. For more information about specifications and analyzer operations request ClearView db document #1033 or call Guided Wave.

No. of Channels	Up to 2 (two) sample channels and optional turbidity monitoring
Outputs (analog)	Up to 6 for a one channel unit Up to 4 per channel for a two channel unit 4 – 20 mA, customer powered
Outputs (discreet)	Up to 6 for a 1 channel unit Up to 4 per channel for a 2 channel unit contact closures
Inputs (analog)	4 (optional) 4 – 20 mA, isolated grounds
Local Display	LCD touch screen, color QVGA
Communications	Ethernet (TCP Modbus) standard
Enclosures	General Purpose NEMA 4 unclassified Z-Purge, NEMA 4x, CI D2 X-Proof, ICEEx, ATEX, CI D1



+1 916-638-4944 phone  
+1 916-635-8458 fax

GWinfo@guided-wave.com  
An Advanced Company

Literature: 1064-17-03-23